


EZ SERIES RK

Replacement for the Ice-Cap RSK

Islandaire EZ Series RK is a replacement for the Ice-Cap RSK unit. Our commercial duty construction with heavy gauge galvanized steel and superior components create an efficient reliable unit. This design eliminates the need for any interior or exterior renovation. Use of the existing wall sleeve-cabinet and louver saves time and money, two very important factors in today's competitive environment! If the need does occur where the wall sleeve-cabinet, hydronic coil, and/or louver needs to be replaced, we manufacture these accessories as well.

FEATURES

- Proudly Made in the U.S.A.
- UL listed products
- Superior Energy Efficiency Ratios (EERs)
- Commercial Duty Construction with Heavy Gauge Galvanized Steel
- Designed for replacement of existing sleeve opening
- Rotary and Reciprocating Compressors Available
- Emerson, General Electric, and MagneTek P.S.C. Evaporator and Condenser Motors Used
- High-Efficiency Refrigeration Coils Used to Provide Superior Heat Transfer
- Ranco Thermostats Provide Accurate, Dependable Temperature Sensing
- Units Available as Cooling only, Cooling with Electric Heat, Cooling with Hydronic Heat, or Heat Pumps
- Custom Options Available
- Available with State-of-the-Art Digital *Intellitemp™* Control System
- Dual Condensate Drain

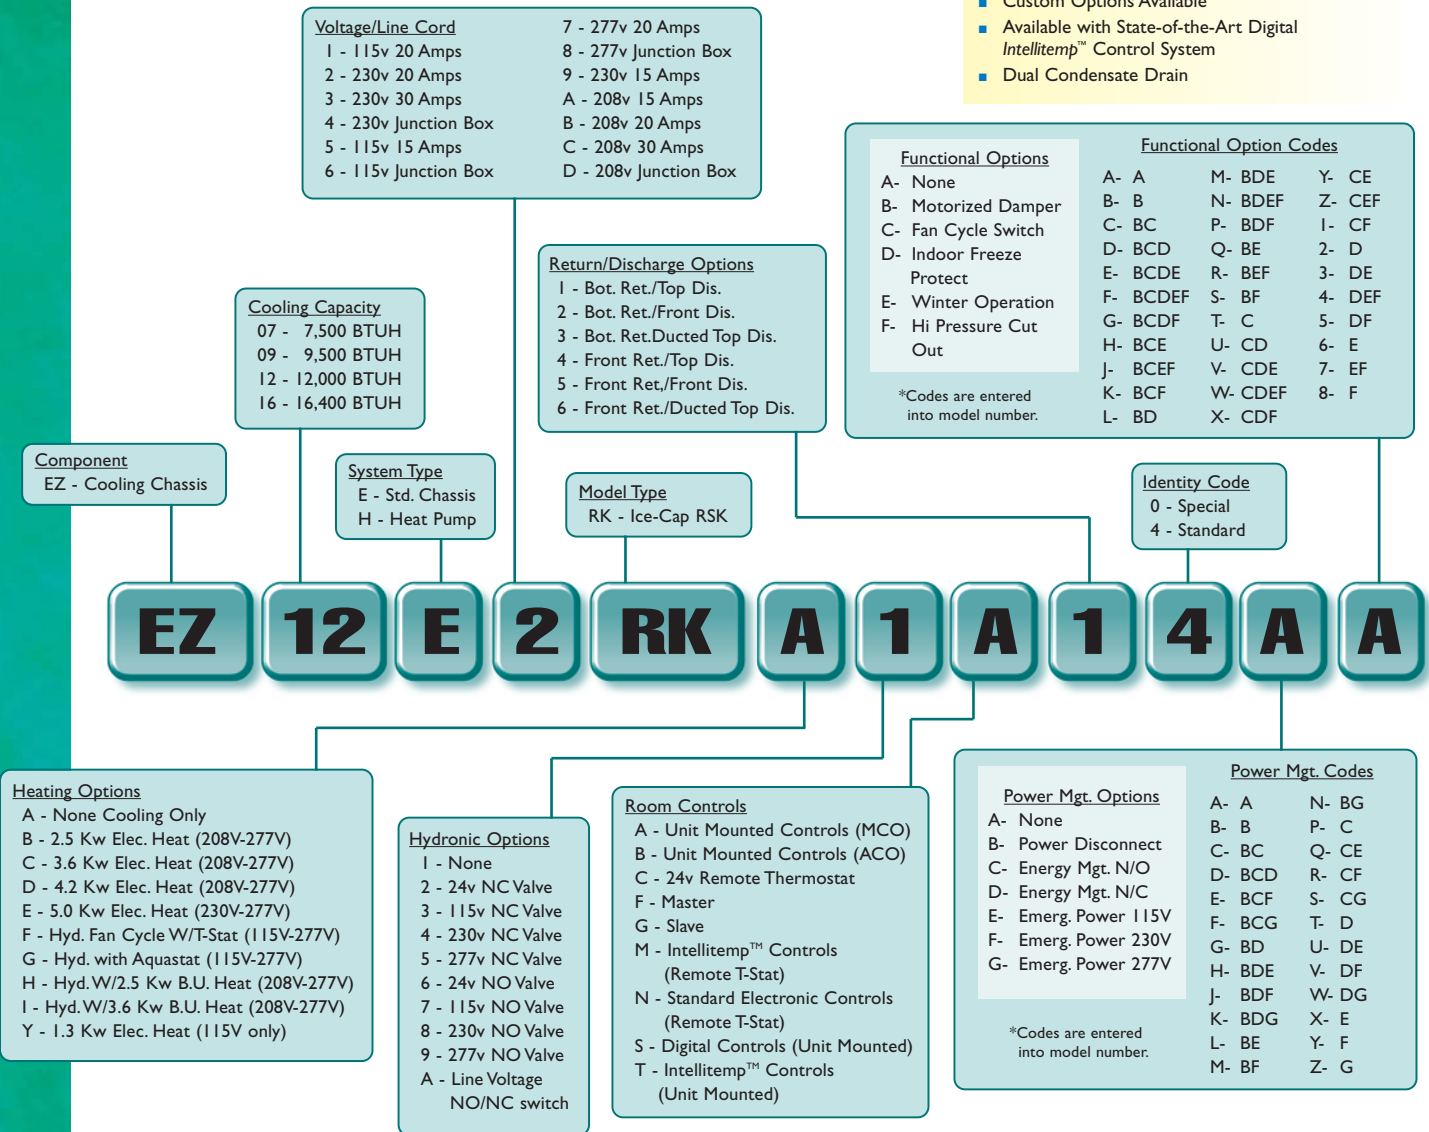

*Specifications are subject to change due to ongoing product development.



Wall sleeve-cabinets
and exterior louvers available.
See accessories on pages 70-71.

MODELS

	EZ07				EZ09				EZ12				EZ16			EZ18		
	115	230	208	277	115	230	208	277	115	230	208	277	230	208	277	N/A	N/A	N/A
BTUH COOLING	7,500	7,500	7,300	7,500	9,500	9,500	9,300	9,500	12,200	12,200	12,000	12,200	16,400	16,200	16,400	N/A	N/A	N/A
AMPS	5.7	2.9	3.1	2.3	7.4	3.7	4.0	3.1	10.1	5.1	5.5	4.2	6.8	7.5	5.8	N/A	N/A	N/A
WATTS COOLING	660	658	640	647	845	850	830	848	1135	1140	1123	1143	1572	1557	1614	N/A	N/A	N/A
EER	11.4	11.4	11.4	11.6	11.2	11.2	11.2	11.2	10.7	10.7	10.7	10.7	9.6	9.6	9.6	N/A	N/A	N/A
CFM HIGH	340	340	320	340	400	400	380	400	400	400	380	400	460	440	460	N/A	N/A	N/A
CFM LOW	260	260	240	260	260	260	240	260	340	340	320	340	340	320	340	N/A	N/A	N/A
BTUH HEATING	N/A	7,100	6,900	7,100	N/A	9,300	9,100	9,300	N/A	11,400	11,200	11,400	14,300	14,200	14,800	N/A	N/A	N/A
WATTS HEATING	N/A	740	720	740	N/A	901	780	871	N/A	1014	979	979	1290	1365	1380	N/A	N/A	N/A
C.O.P.	N/A	2.9	2.9	2.9	N/A	3.03	2.9	3.13	N/A	3.30	2.9	3.41	3.25	2.7	3.14	N/A	N/A	N/A

Heating Option	Voltage (1)	Wattage	B.T.U.s (2)	Amps (3)
B	208	2,050	7,000	10.46
	230	2,500	8,535	11.47
	277	2,500	8,535	9.63
C	208	2,950	10,070	14.78
	230	3,600	12,290	16.25
	277	3,600	12,290	13.60
D	208	3,433	11,720	17.10
	230	4,200	14,330	18.86
	277	4,200	14,330	15.76
E	208	4,100	14,000	20.31
	230	5,000	17,070	22.34
	277	5,000	17,070	18.65

(1) Voltage is Single Phase, Alternating Current and R.M.S. (2) Heating Capacity (B.T.U./Hr.) based on indoor blower motor and heating elements. (3) Amp values are a combination of indoor blower motor and heating elements.

Line Voltage	Maximum Amperage	Wall Socket Configuration	Receptacle Number	Electrical Heat Options
115	16		NEMA 5-20R	N/A
208/230	12		NEMA 6-15R	N/A
208/230	16		NEMA 6-20R	2.5 - 3.6
208/230	24		NEMA 6-30R	4.2 - 5.0
277	16		NEMA 7-20R	2.5 - 5.0

Heating capacities specified in accordance with ARI standard 380-82 at conditions of 47°F WB outdoor and 70°F DB/60°F FWB indoor. Wattage, Amperage, COP, EER listings include compressor, evaporator motor and condenser fan motor. Cooling capacities specified in accordance with ARI standard 380-82 at conditions of 95°F DB/75°F FWB outdoor and 80°F DB/67°F FWB indoor.

